




Industrial Automation Products & Solutions

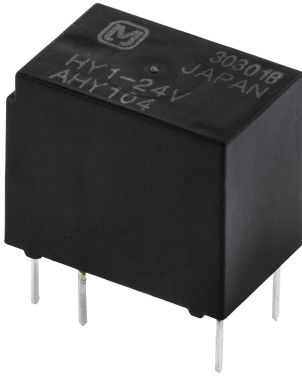

Panasonic PCB Mount Signal Relay, 24V dc Coil, 2A Switching Current, SPDT

ผู้ผลิต : Panasonic

รหัสสินค้า : HY124

Specifications

คุณลักษณะ	รายละเอียด
Coil Voltage	24V dc
Contact Configuration	SPDT
Mounting Type	PCB Mount
Maximum Switching Current DC	2 A
Maximum Switching Voltage AC	120V ac
Maximum Switching Voltage DC	60V dc
Maximum Switching Power DC	30 W
Series	HY
Length	12.5mm
Depth	7.4mm
Height	10.1mm
Dimensions	12 x 10.1 x 7.4mm
Terminal Type	PCB Pin
Number of Poles	1
Application	Automotive
Switching Current	2A
Maximum Switching Power AC	60VA



บริษัท ทีเอส โซลูชั่น จำกัด

27/66 ถนนรัชดา-รามอินทรา แขวงรามอินทรา เขตคันนายาว กรุงเทพมหานคร 10230

โทร : 02-066-1996 | Line OA : @thsolution | www.thsolution.com

Coil Resistance	3.84 k Ω
Operating Temperature Range	-40 - +70°C
Features	Sealed Construction, High Sensitivity
Electrical Life	100000 Operations Cycles
Coil Power	150mW
Minimum Operating Temperature	-40°C
Maximum Operating Temperature	+70°C
Isolation Coil To Contact	1.5kV rms
Life	100000 (Electrical) cycles, 10000000 (Mechanical) cycles
Contact Material	Gold Plated



LINE OA
@thsolution

Need a quotation or technical support?

ติดต่อทีมงาน THSolution สำหรับข้อมูลสินค้า ราคา สต็อกสินค้า

Tel. : 02-066-1996

LINE OA : @thsolution

Website : www.thsolution.com