




## Industrial Automation Products & Solutions

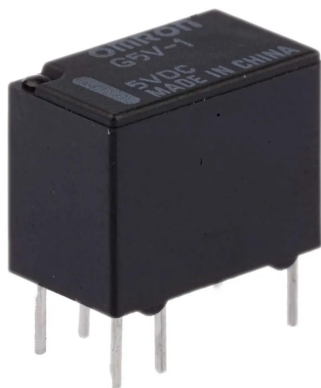

### Omron PCB Mount Signal Relay, 5V dc Coil, 2A Switching Current, SPDT

ผู้ผลิต : Omron

รหัสสินค้า : G5V-1 DC5

## Specifications

| คุณลักษณะ                    | รายละเอียด        |
|------------------------------|-------------------|
| Coil Voltage                 | 5V dc             |
| Contact Configuration        | SPDT              |
| Mounting Type                | PCB Mount         |
| Maximum Switching Current DC | 2 A               |
| Maximum Switching Voltage AC | 125V              |
| Maximum Switching Voltage DC | 60V               |
| Maximum Switching Power DC   | 30 W              |
| Series                       | IM                |
| Length                       | 10mm              |
| Latching                     | No                |
| Depth                        | 7.5mm             |
| Height                       | 10mm              |
| Dimensions                   | 12.5 x 10 x 7.5mm |
| Terminal Type                | Through Hole      |
| Switching Current            | 2A                |
| Number of Poles              | 1                 |
| Application                  | Signal            |
|                              |                   |



## บริษัท ทีเอส โซลูชั่น จำกัด

27/66 ถนนรัชดา-รามอินทรา แขวงรามอินทรา เขตคันนายาว กรุงเทพมหานคร 10230

โทร : 02-066-1996 | Line OA : @thsolution | www.thsolution.com

|                               |                                                           |
|-------------------------------|-----------------------------------------------------------|
| Maximum Operating Temperature | +70°C                                                     |
| Minimum Operating Temperature | -40°C                                                     |
| Contact Material              | Gold Plated                                               |
| Maximum Switching Power AC    | 62.5 VA                                                   |
| Electrical Life               | 10 <sup>5</sup> Operations                                |
| Coil Power                    | 150mW                                                     |
| Coil Resistance               | 167 Î©                                                    |
| Features                      | Conforms to FCC Part 68 Requirements, Bifurcated Contacts |
| Isolation Coil To Contact     | 3.5kV rms                                                 |
| Operating Temperature Range   | -40 - +70°C                                               |



**LINE OA**  
@thsolution

### Need a quotation or technical support?

ติดต่อทีมงาน THSolution สำหรับข้อมูลสินค้า ราคา สต็อกสินค้า

**Tel. :** 02-066-1996

**LINE OA :** @thsolution

**Website :** www.thsolution.com